

ThermoFlow 120

- Total heat management: designed for energy efficiency with the maximum use of controlled ventilation
- Flexible mounting and air intake
- Low current draw
- Limited wear items
- Limited moving parts
- High ROI with energy savings
- Low dollar to watt ratio

GENERAL

UNITS

Model number		TF-110-48
Mounting method		Outdoor
Unit dimensions [height×width×depth]	Inch [mm]	48x19x15 [1220x485x380]
Weight	lbs [kg]	100 [45]

PERFORMANCE

Cooling Capacity	W/°F [W/°C]	120 [216]
Operational temperature range	°F [°C]	-40 to 149 [-40 to 65]
Airflow - maximum	CFM [m ³ /hr]	800 [1360]
Noise, 1.5m distance	dB(A)	68

ELECTRICAL DATA

Input voltage	Volts	48 VDC
Current	Amps	7.5

APPROVALS


RoHS, UL and cUL compliant	✓	In process
NEMA	✓	3R

CONSTRUCTION

Material	Aluzink Standard, Stainless Steel Optional	
Finish	Textured Powder Coat Standard, Color options available by request	

THERMOFLOW 110 CAPACITY CHART

Heat Removal at Recommended ΔT

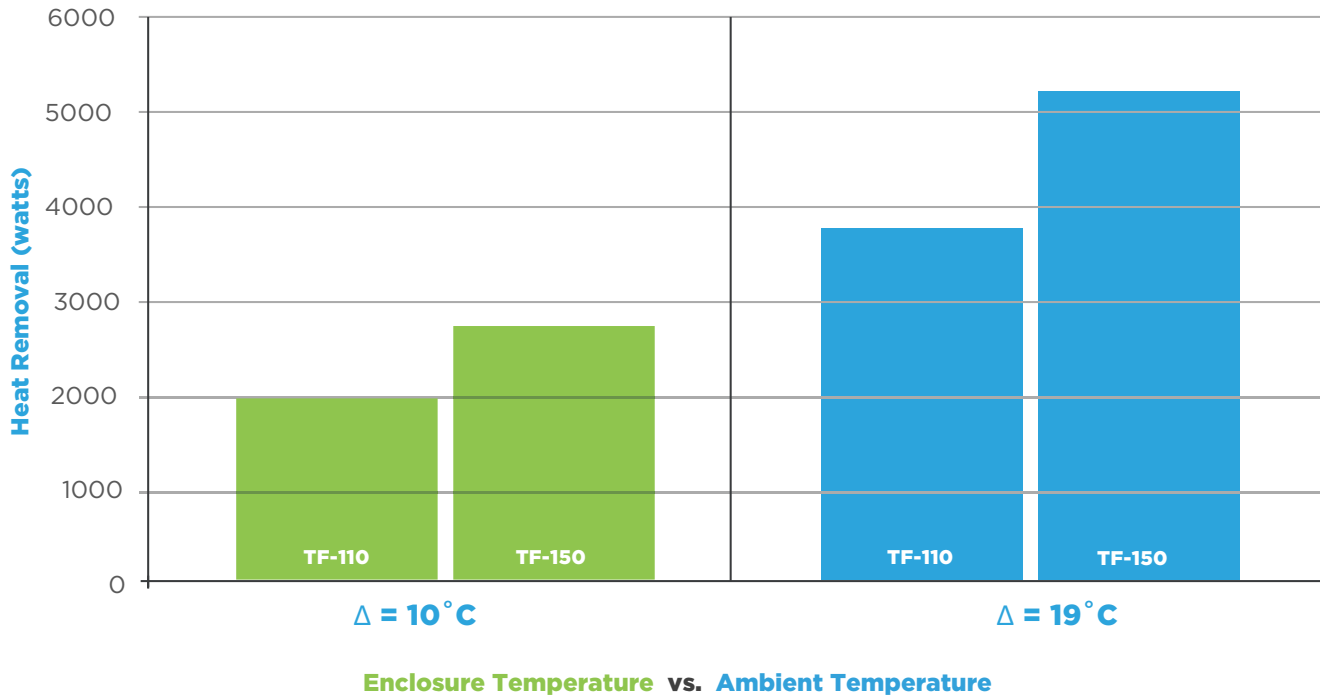

DIMENSIONAL DIAGRAM-MOUNTING INTERFACE

