



HexFlow 17 SQ

- Closed-loop cooling to prevent ingress of environmental contaminants
- Filterless design requires little to no service
- Compact, lightweight unit for easy installation
- Environmentally-friendly design, CFC and refrigerant-free
- High-quality, high-performance, high-pressure drop BCI fans
- Efficient-coated aluminum cross-flow core
- Engineered for extreme and/or corrosive environments
- Designed in accordance with GR-487 specifications
- Fan speed controller with alarm output
- Stainless steel material and custom paint finishes

GENERAL

UNITS

Model number		HF-17-115-SQ	HF-17-230-SQ	HF-17-24-SQ	HF-17-48-SQ
Mounting method		Outdoor			
Unit dimensions [height×width×depth]	Inch [mm]	18x16x4.5 [457.2x406.4x114.3]			
Weight	lbs [kg]	21 [9.5]			

PERFORMANCE

Cooling Capacity	W/°F [W/°C]	17 [30]			
Operational temperature range	°F [°C]	-40 to 149 [-40 to 65]			
Noise, 1.5m distance	dB(A)	65			

ELECTRICAL DATA

Input voltage	Volts	120 VAC	240 VAC	24 VDC	48 VDC
Current	Amps	0.5	0.3	1.75	2.3

APPROVALS


RoHS, UL and cUL Compliant	✓	UL file SA12349			
----------------------------	---	-----------------	--	--	--

CONSTRUCTION

Material	Aluzink Standard, Stainless Steel Optional				
Finish	Textured Powder Coat Standard, Color options available by request				

HEXFLOW 17SQ CAPACITY CHART

Heat Removal at Recommended ΔT

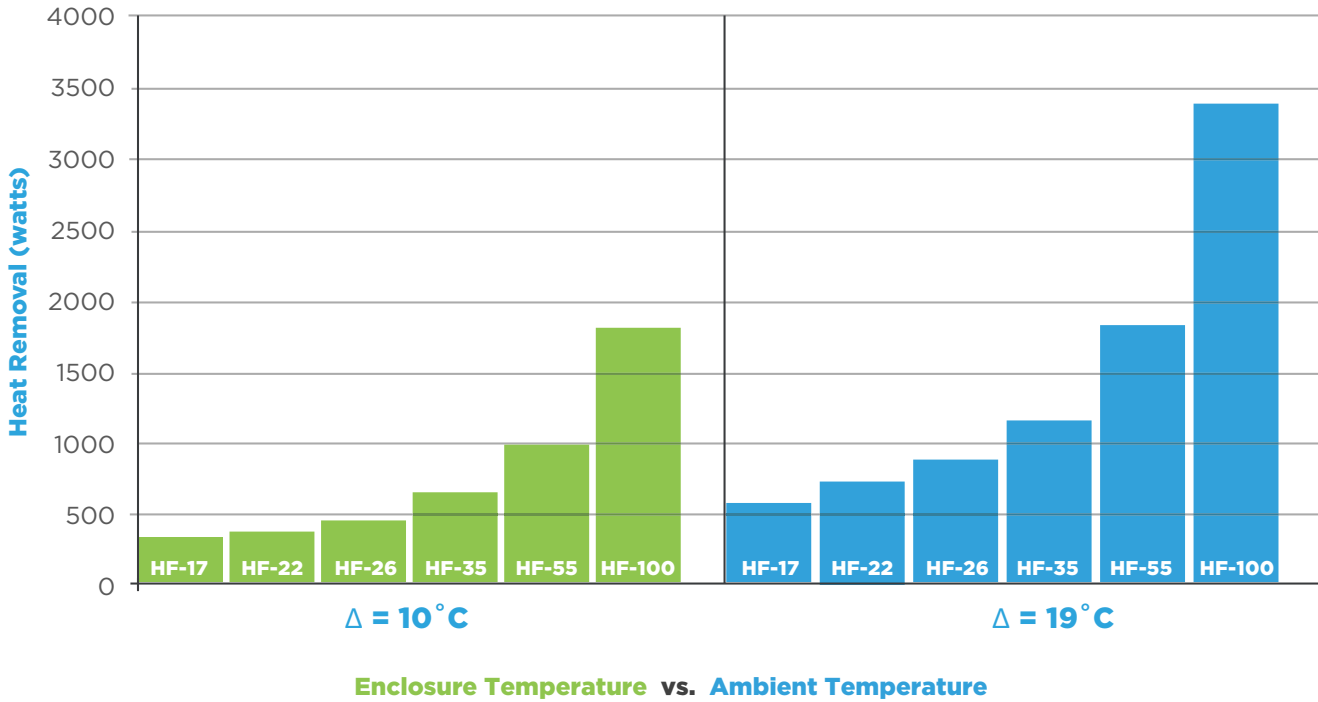

DIMENSIONAL DIAGRAM-MOUNTING INTERFACE

