



## HexFlow 22

- Closed-loop cooling to prevent ingress of environmental contaminants
- Filterless design requires little to no service
- Compact, lightweight unit for easy installation
- Environmentally-friendly design, CFC and refrigerant-free
- High-quality, high-performance, high-pressure drop BCI fans
- Efficient-coated aluminum cross-flow core
- Engineered for extreme and/or corrosive environments
- Designed in accordance with GR-487 specifications
- Fan speed controller with alarm output
- Stainless steel material and custom paint finishes

### GENERAL

### UNITS

Model number		HF-22-115	HF-22-230	HF-22-24	HF-22-48
Mounting method		Outdoor			
Unit dimensions [height×width×depth]	Inch [mm]	23x12x7 [584.2x304.8x177.8]			
Weight	lbs [kg]	23 [10.5]			

### PERFORMANCE

Cooling Capacity	W/°F [W/°C]	22 [40]			
Operational temperature range	°F [°C]	-40 to 149 [-40 to 65]			
Noise, 1.5m distance	dB(A)	65			

### ELECTRICAL DATA

Input voltage	Volts	120 VAC	240 VAC	24 VDC	48 VDC
Current	Amps	0.5	0.3	1.75	2.3

### APPROVALS


RoHS, UL and cUL Compliant	✓	UL file SA12349			
----------------------------	---	-----------------	--	--	--

### CONSTRUCTION

Material	Aluzink Standard, Stainless Steel Optional				
Finish	Textured Powder Coat Standard, Color options available by request				

# HEXFLOW 22 CAPACITY CHART

## Heat Removal at Recommended $\Delta T$

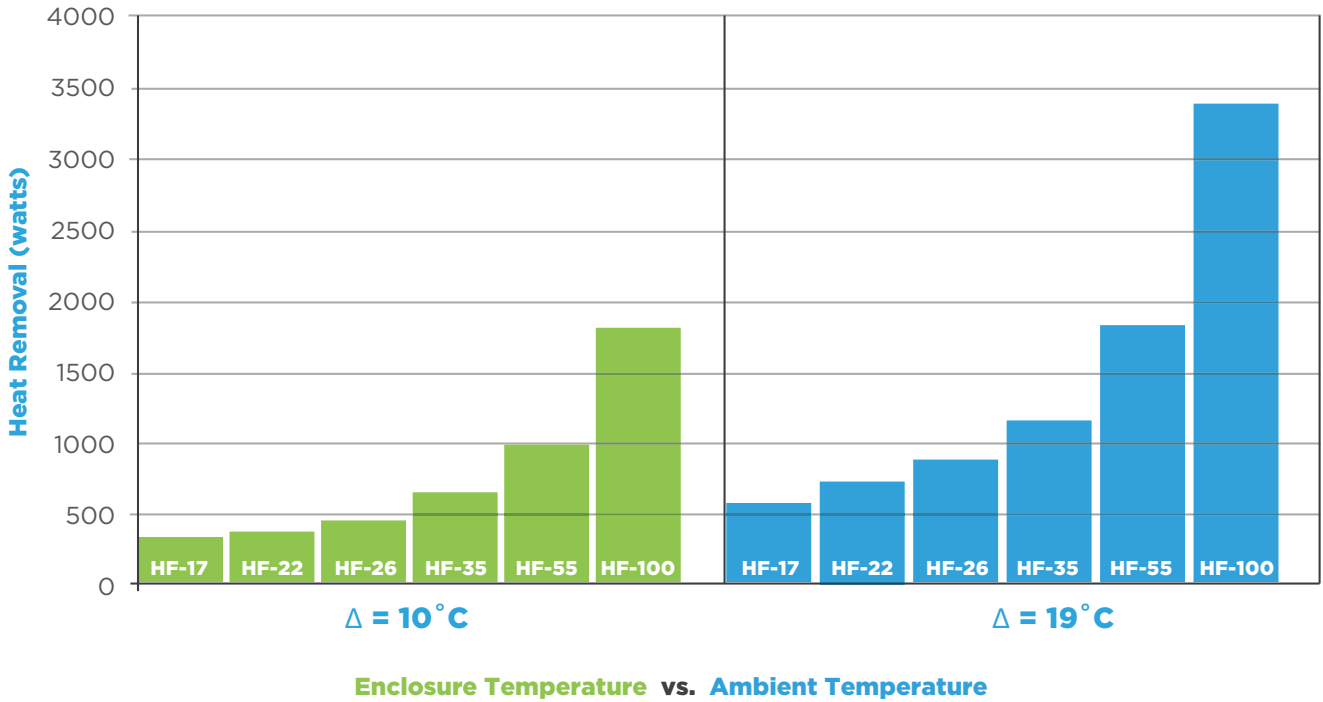

## DIMENSIONAL DIAGRAM-MOUNTING INTERFACE

