

## HexFlow 55

- Closed-loop cooling to prevent ingress of environmental contaminants
- Filterless design requires little to no service
- Compact, lightweight unit for easy installation
- Environmentally-friendly design, CFC and refrigerant-free
- High-quality, high-performance, high-pressure drop BCI fans
- Efficient-coated aluminum cross-flow core
- Engineered for extreme and/or corrosive environments
- Designed in accordance with GR-487 specifications
- Fan speed controller with alarm output
- Stainless steel material and custom paint finishes

### GENERAL

### UNITS

Model number		HF-55-115	HF-55-230	HF-55-24	HF-55-48
Mounting method		Outdoor			
Unit dimensions [height×width×depth]	Inch [mm]	36x18x8.8 [914.4x457.2x223.52]			
Weight	lbs [kg]	70 [31.8]			

### PERFORMANCE

Cooling Capacity	W/°F [W/°C]	55 [99]			
Operational temperature range	°F [°C]	-40 to 140 [-40 to 60]			
Noise, 1.5m distance	dB(A)	72			

### ELECTRICAL DATA

Input voltage	Volts	115 VAC	230 VAC	24 VDC	48 VDC
Current	Amps	3.4	1.86	8.6	4.3

### APPROVALS


RoHS, UL and cUL Compliant	✓	UL file SA12349			
----------------------------	---	-----------------	--	--	--

### CONSTRUCTION


Material	Aluzink Standard, Stainless Steel Optional				
Finish	Textured Powder Coat Standard, Color options available by request				

# HEXFLOW 55 CAPACITY CHART

## Heat Removal at Recommended $\Delta T$

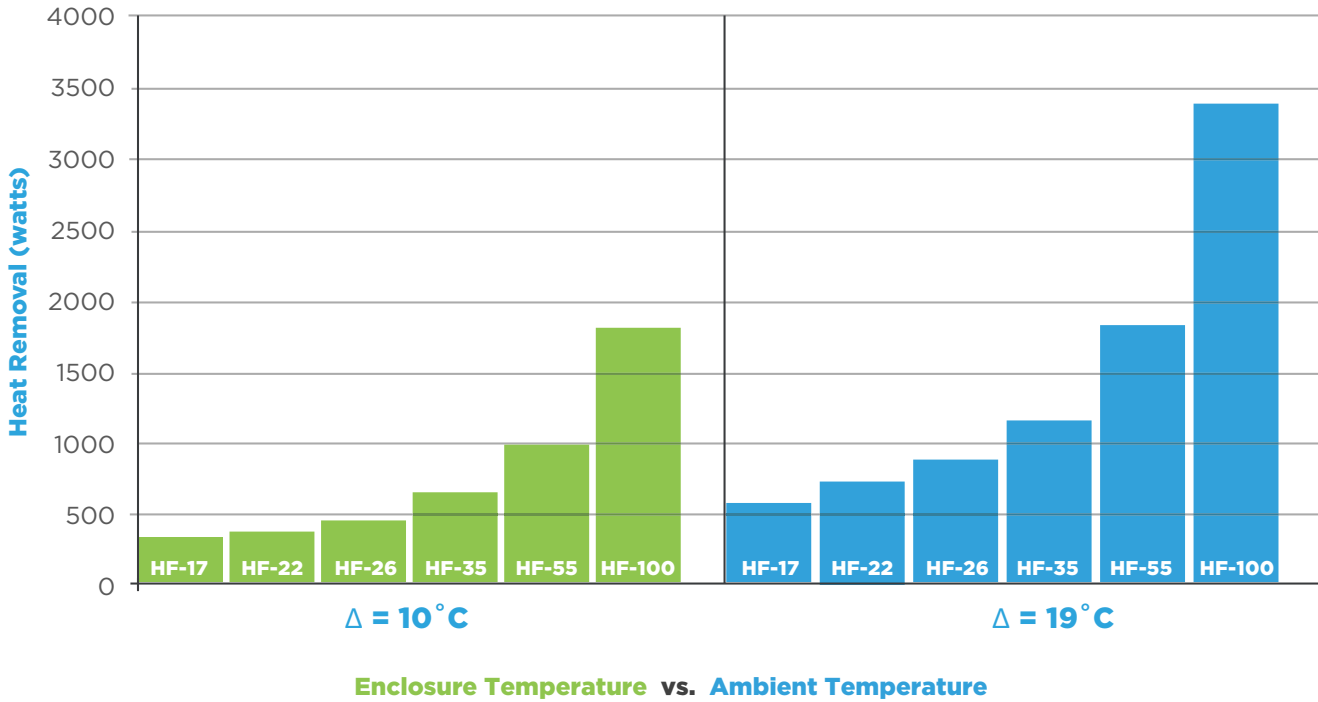

# DIMENSIONAL DIAGRAM-MOUNTING INTERFACE

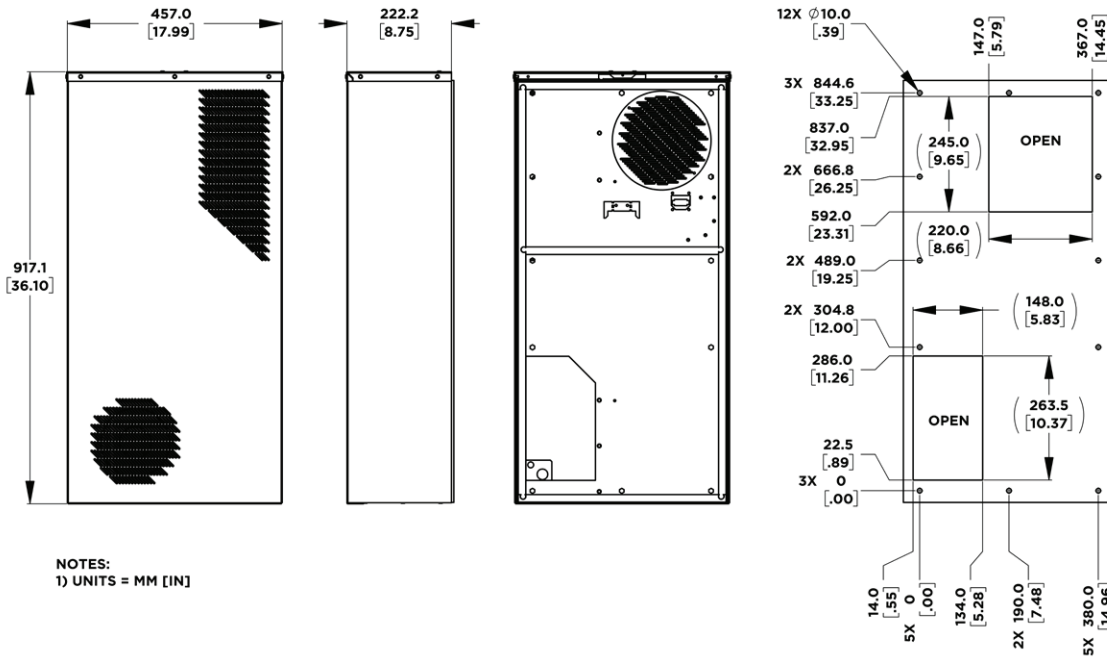

 [danthermcooling.com](http://danthermcooling.com)  
 [sales.usa@danthermcooling.com](mailto:sales.usa@danthermcooling.com)  
 864-595-9800  
 671 Springfield Road  
 Spartanburg SC, 29303